



### WALL MOUNT ENCLOSED KIOSK



#### DB Series: Multi-Touchscreen Kiosk

Industrial Grade LCD Monitor in sizes 32", 40", 42", 46" and 55".

Wall Mounted Kiosk ideal for heavy traffic locations. It is built with a rugged steel structure to withstand constant public use.

The DB Series feature the Multi-Touch screen optical sensor technology for unparalleled performance and superior visual.



DB-55

DB-42

- 32", 40", 42", 46" & 55" LCD sizes
- Optical touch screen available
- Rugged steel structure
- Optional integrated computer/speakers
- Wide range of finish options and customizable peripherals
- Light-duty outdoor kiosk shell available

The DB Series is designed as a stand-alone wall mounted interactive digital signage system. It's a complete solution with touch screen display and optional computer integrated into a rugged metal, free-standing enclosure. With a lockable enclosure door and heavy gauge steel casement, the DB Series provides secure protection for the computer/player and the entire system. Industrial grade LCDs are built for 24/7 display time.

### DIGITAL SIGNAGE DISPLAY & COMPUTER

#### • All-In-One Digital Signage Touchscreen Display

The 1080PC is a Computer Module engine that will drive dynamic multimedia content, including video, flash, images, website, RSS messaging, alert messages, capture data, etc...

The computer can be configured to be part of a network which can be remotely managed, checking status and issue auto-detection of system diagnosis for trouble-shooting purposes.


Customers can also provide their own compact PC to be securely placed inside the DB enclosure. Custom metal brackets are available.



Ideal for:

- Digital Signage
- Information Kiosks
- Hospitality
- Directory Search Kiosk
- Alert Messaging
- Wayfinding

### SPECIFICATIONS & MECHANICAL DRAWING

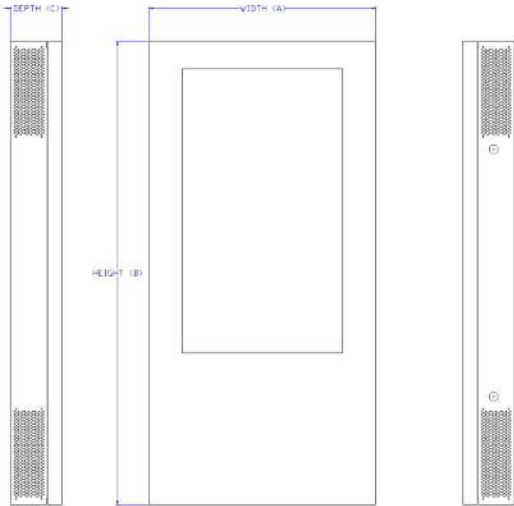

SPECS	LCD PANEL			
	DB32	DB42	DB46	DB55
Display Size	32" LCD	42" LCD	46" LED	55" LED
Resolution	1366 x 768	1920 x 1080	1920 x 1080	1920 x 1080
Viewing Angle	H: 178°, V: 178°	H: 176°, V: 176°	H: 176°, V: 176°	H: 178°, V: 178°
Contrast Ratio	3500:1	3500:1	3000:1	4000:1
Brightness	500 cd/m2	500 cd/m2	600 cd/m2	600 cd/m2
Response Time	8 ms	8 ms	8 ms	9 ms
Aspect Ratio	16:9	16:9	16:9	16:9
Unit Dimensions	W:22" x H:45" x D:5"	W:28" x H:55" x D:5"	W:30" x H:58" x D:5"	W:36" x H:70" x D:5"
Touch Screen	Optical Touchscreen, 4-6 mm glass, USB Interface, fully HID compliant, Supports OS Windows, Unix, Mac			
Mounting Bezel	Standard black powder coat finish on rugged steel structure			
Warranty	24 Month Limited Warranty. Extended warranty available, contact us for more details			

SPECS	COMPUTER MODULE
	1080PC
System	Mini-ITX ATI Fusion: 2x Ethernet RealTek 1.0Gb, 4x USB 2.0, 2x RS232 Ports, Audio In/Out, DVI, PS/2
CPU	Mini-ITX Intel CP100: Up to 8Gb DDR3, 4x USB, 2x Ethernet, 2x COM, DVI, VGA, 1x 3 Jacks Audio I/O, PS/2
Operating System	AMD Mobile Fusion, iCore i3, i5, i7
Memory	Windows XP Pro, Windows XP Embedded, Windows 7, Windows 7 Embedded, ROMDOS
Storage Drive	2Gb to 8Gb DDR2 or DDR3
Power Supply	2.5" SATA Hard Drives / 2.5" Solid State Drives
Temperature	Optional 12V Input DC Jack, EXTERNAL SOURCE
Relative Humidity	0°~50°C (32°~122°F) Operating / -25°~60°C (-4°~140°F) Non-Operating
Shock	20% ~ 80% Non-Condensing
Vibration	10G Operating / 15G Non-Operating
Warranty	1.0G from 57-2000 Hz Operating / 2.5G from 57-2000 Hz Non-Operating
	24 Month Limited Warranty. Extended Warranty Available, Contact Us For More Details

### CUSTOMIZATION

The DB enclosure is highly configurable and can be customized with card readers, cameras, keyboards, thermal printers, bio readers, WiFi network and more...

All of our Products can be tailored to your specific business, talk to one of our technicians to help you design the best interactive solution for you. Contact us today!

- Front & Side Panels
- Portrait or Landscape Display
- Aluminum, Brushed Metal Finish
- Wood, Plastic, Laminate Accents
- Custom Colors and Logos
- Soundbar & Remote Wireless Speakers
- Integrated PC Module
- Wireless Networking
- Card Swipes
- Thermal Printers
- Biometric Readers
- Webcam