

WX15 Front Interface Module

WX15 with
MTX3 Chassis




Industrial 15" Front Interface Module

The WX15 is a replacement front interface module for legacy webLink15F and paneLink15 systems. The WX15 can be connected to various Chassis Modules to form a complete industrial computer solution.

- Panel:** 15" TFT LCD
- Resolution:** XGA 1024 x 768
- Viewing Angle:** (h|v): -65/+65 | -60/+50
- Brightness:** 300 nits
- Bulb Life:** CCFT @ 50,000 Hours
- Lens:** Anti-Glare 5-Wire Resistive Touchscreen
OR Anti-Glare Lexan
- Contrast Ratio:** 450:1

Specifications & Configurator

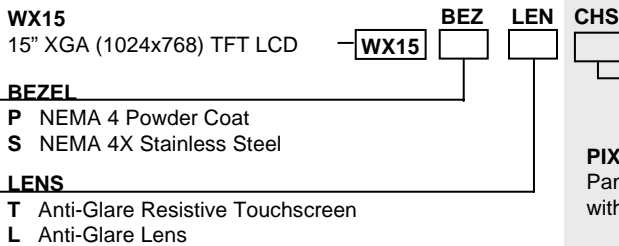

AVAILABLE CHASSIS MODULES

Use specific chassis configurator to complete P/N

PIX Chassis - Compact
Panel PC modules available with 0,1 and 3 slot options.

PIX0



4.0"

PIX1



4.9"



PIX3




6.1"

Panel Mounting
Depths


FRONT DIMENSIONS

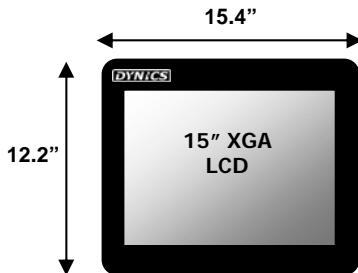

MTX3 Chassis -
Active backplane
system with 3 PCI
slots.



FGX7 Chassis -
Passive backplane
system with 1
PICMG/2 ISA/3
PCI slots and pull-
out hard drive



Dynics Inc
4330 Varsity Drive
Ann Arbor MI 48108
734.677.6100

*Mounting depth is increased 0.60" with rear mounted thin CD/DVD drive
Illustrations are not to scale

Industrial Computer Module MTX3

Industrial Computer System



Active Backplane Industrial Computer

The MTX3 is an industrial computer module that can be connected to various front Interface modules or on its own to form a complete industrial computer solution.

- CPU:** Core 2 Duo, Pentium M
- Memory:** Up to 2.0 GB
- Serial Ports:** RS-232 and RS-232/422/485 Available
- USB Ports:** Four USB 2.0
- Networking:** One 1.0 GB Ethernet Port
- Video:** One RGB Port, On-Board Configurable
- Available Disk Drives:** 3.5" IDE Drives, Industrial CF Cards
- Keyboard/Mouse:** One PS/2
- Expansion Slots:** PCI and PCI Express Slots
- Power Supply:** 120-240 VAC
- Temperature Specs:** 0°-50°C (32°- 122°) operating
-25°-60°C (-4°-140°) non-operating
- Relative Humidity:** 10 ~ 95% non-condensing
- Shock:** 10G operating - 15G non-operating
- Vibration:** 1.0G from 57-2000 Hz operating
2.5G from 57-2000 Hz non-operating

Specifications & Configurator


AVAILABLE FRONT INTERFACE MODULES

- FX15** 15" XGA TFT LCD
- FX17** 17.1" SXGA TFT LCD
- FX19** 19" SXGA TFT LCD
- FX20** 20" UXGA TFT LCD

- IC15** 15" XGA TFT LCD
- IC17** 17.1" SXGA TFT LCD

- WX15** 15" XGA TFT LCD
- WX17** 17.1" SXGA TFT LCD

- INX6** 10.4" VGA LCD Keypad
- INX9** 12.1" SVGA LCD Keypad
- INX95** 12.1" SVGA TFT LCD
- INX85** 15" XGA TFT LCD
- AAT2** 18.1" SXGA TFT LCD



CHASSIS MODULE

MTX3 Active Backplane, 120-240 VAC

SYSTEM CONFIGURATION

- M1** Pentium M: 3 PCI Slots, 1.0 Gb Ethernet Port, 4 USB 2.0 Ports, 3 RS232 1 RS232/422/485 Ports, 2 PS/2, Audio I/O
- M2** Core 2 Duo/Celeron D/Pentium D board, 2 PCI, 1 PCI-X, 1.0 Gb Ethernet, 4 USB 2.0, 2 RS232 Port, 2 PS/2, Audio I/O

CPU CONFIGURATION

- 61** 1.6 GHz Pentium M 400 FSB (*M1 System*)
- D0** 1.8 GHz Core 2 Duo 800 FSB (*M2 System*)
- D1** 2.0 GHz Core 2 Duo 800 FSB (*M2 System*)
- D4** 2.4 GHz Core 2 Duo 1066 FSB (*M2 System*)

OPERATING SYSTEM

- XX** No Operating System **XP** Windows XP Pro
- W2** Windows 2000 Pro

MEMORY

- K** 256 MB DDR RAM **P** 1.0 GB DDR RAM
- L** 512 MB DDR RAM **R** 2.0 GB DDR RAM

DRIVE BAY

- 80** 80 GB 3.5" Hard Drive
- 12** 120 GB 3.5" Hard Drive

INTERNAL COMPACT FLASH CARD

- XX** No Internal CF Card **C5** 1.0 GB Industrial CF **C7** 4.0 GB Industrial CF
- C4** 512 MB Industrial CF **C6** 2.0 GB Industrial CF **C8** 8.0 GB Industrial CF

CD CONFIGURATION


- B** Internal Slim DVD-RW **N** No CD Drive
- Z** Internal Slim DVD/CD-RW

FLOPPY DRIVE

- N** No Floppy Drive **F** Internal Slim Floppy Drive

DIMENSIONS

Image not to scale

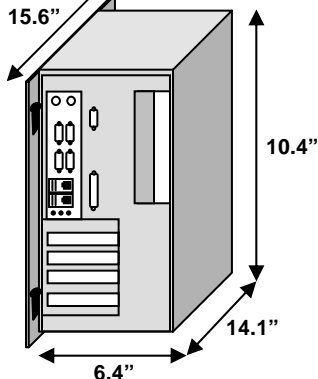

Dynics Inc
4330 Varsity Drive
Ann Arbor MI 48108
734.677.6100